

Brillensteckscheiben BS/BSS Spectacle Blinds BS/BSS

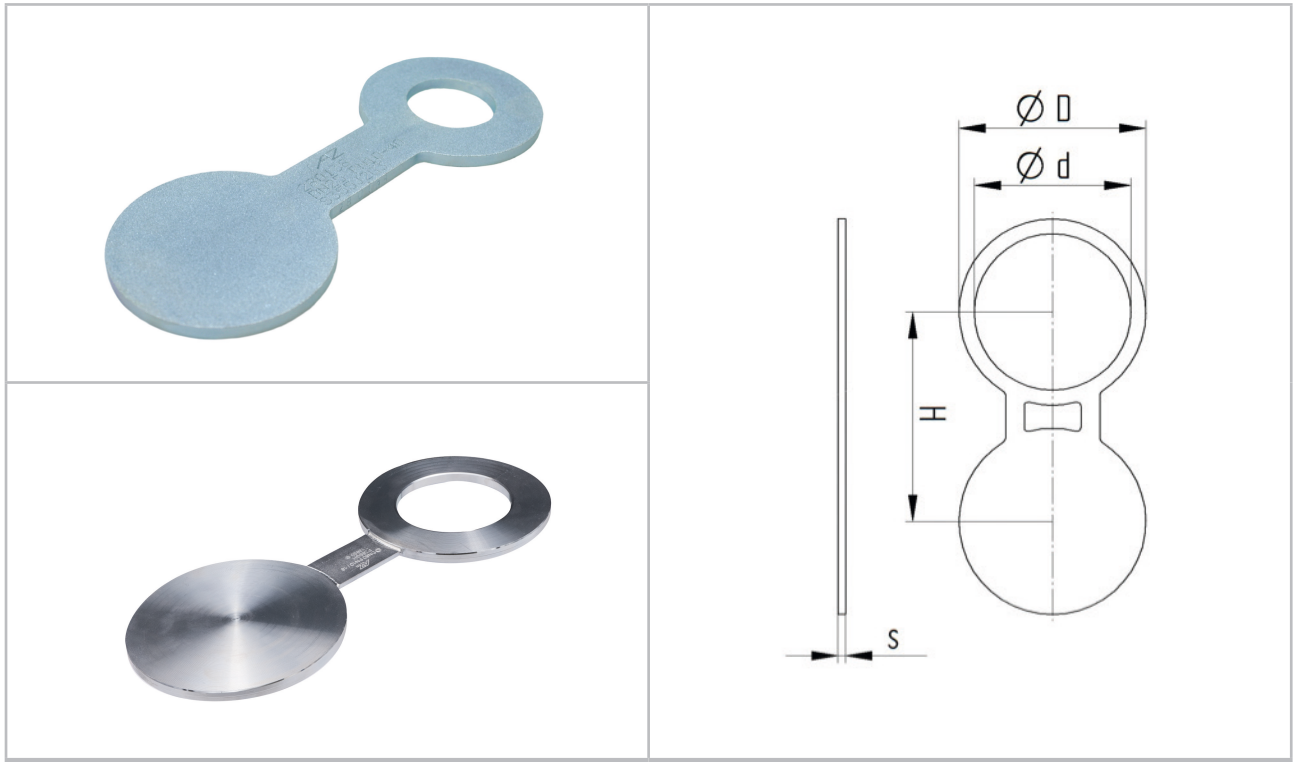


Abbildung ggf. abweichend · picture may be different

Material	Material
Stahl verzinkt Edelstahl	steel zinc coated stainless steel
Merkmale	Details
<ul style="list-style-type: none"> ▶ Brillensteckscheibe zum Einbau in Leitungsanlagen ▶ zur Zwischenflanschmontage für Flansche nach DIN EN 1092-1 ▶ Nennweite: DN15 ... DN500 ▶ Betriebsdruck: PN10 ... PN40 ▶ Kennzeichnung mit: Hersteller, DN, PN, Werkstoff, Ident.-Nr. <p>auf Anfrage:</p> <ul style="list-style-type: none"> ▶ Prüfbescheinigung nach DIN EN 10204 ▶ andere Materialien ▶ andere Abmessungen und Wandstärken 	<ul style="list-style-type: none"> ▶ spectacle blind for installation in pipe system ▶ for inter flange mounting of flanges according to DIN EN 1092-1 ▶ nominal size: DN15 ... DN500 ▶ operating pressure: PN10 ... PN40 ▶ marking with: manufacturer, DN, PN, material, ident.-no. <p>on request:</p> <ul style="list-style-type: none"> ▶ test certificate acc. to DIN EN 10204 ▶ other materials ▶ other dimensions and wall thickness

Brillensteckscheiben BS/BSS

Spectacle Blinds BS/BSS

BS zur Zwischenmontage - Stahl verzinkt - keine überdrehten Dichtflächen							
BS for interflange mounting - steel zinc coated - turned seal face							
Bezeichnung Type	DN	PN bar	H mm	D mm	d mm	s mm	Bestell-Nr. Order-No.
BS-DN15	15	10-40	96	51	22	5	auf Anfrage on request
BS-DN20	20	10-40	106	61	27,5	5	86-003-016
BS-DN25	25	10-40	116	71	34,5	5	86-003-001
BS-DN32	32	10-40	128	82	43	10	86-003-017
BS-DN40	40	10-40	138	92	49,5	5	auf Anfrage on request
BS-DN50	50	10-40	158	107	61,5	10	86-003-002-2
BS-DN65	65	10-40	176	127	77	10	86-003-003
BS-DN80	80	10-40	192	142	90	10	86-003-004
BS-DN100	100	10/16	220	162	116	10	86-003-005
BS-DN125	125	10/16	240	192	141	10	86-003-006
BS-DN150	150	10/16	265	218	170	10	86-003-007
BS-DN200	200	10/16	320	268	213	15	86-003-008
BS-DN250	250	16	380	328	270	15	86-003-009-5
BS-DN300	300	40	476	417	320	25	86-003-010-3
BS-DN350	350	10/16	500	438	365	15	auf Anfrage on request
BS-DN400	400	16	556	495	415	20	86-003-012
BS-DN500	500	10	658	594	5015	20	auf Anfrage on request

BS zur Zwischenmontage - Edelstahl - keine überdrehten Dichtflächen							
BS for interflange mounting - stainless steel - nonturned seal face							
Bezeichnung Type	DN	PN bar	H mm	D mm	d mm	s mm	Bestell-Nr. Order-No.
BS-25-VA	25	10-40	116	71	34,5	5	86-100-016-025
BS-50-VA	50	10-40	158	107	61,5	10	86-100-016-050
BS-65-VA	65	10-40	178	127	77,5	10	86-100-016-065
BS-80-VA	80	10-40	192	142	90,5	10	86-100-016-080
BS-100-VA	100	10/16	220	162	116	10	86-100-016-100
BS-125-VA	125	10/16	240	192	141,5	10	86-100-016-125
BS-150-VA	150	10/16	265	218	170,5	10	86-100-016-150
BS-200-VA	200	16	320	268	213	15	86-100-016-200

Brillensteckscheibe BS/BSS Spectacle Blind BS/BSS

BSS zur Zwischenmontage - Stahl verzinkt - überdrehte Dichtflächen

BSS for interflange mounting - steel zinc coated - turned seal face

Bezeichnung Type	DN	PN bar	H mm	D mm	d mm	s mm	Bestell-Nr. Order-No.
BSS-GD-PN16-DN25-Stahl verzinkt	25	16	116	71	30	5	86-6-025-1
BSS-GD-PN16-DN50-Stahl verzinkt	50	16	158	107	55	6	86-6-050-1
BSS-GD-PN16-DN65-Stahl verzinkt	65	16	178	127	75	6	86-6-065-1
BSS-GD-PN16-DN80-Stahl verzinkt	80	16	192	142	85	8	86-6-080-1
BSS-GD-PN16-DN100-Stahl verzinkt	100	16	220	162	110	8	86-6-100-1
BSS-GD-PN16-DN125-Stahl verzinkt	125	16	240	192	138	9	86-6-125-1
BSS-GD-PN16-DN150-Stahl verzinkt	150	16	266	218	160	9	86-6-150-1
BSS-GD-PN16-DN200-Stahl verzinkt	200	16	322	273	210	12	86-6-200-1

BSS zur Zwischenmontage - Edelstahl - überdrehte Dichtflächen

BSS for interflange mounting - stainless steel - turned seal face

Bezeichnung Type	DN	PN bar	H mm	D mm	d mm	s mm	Bestell-Nr. Order-No.
BSS-GD-PN16-DN25-1.4571	25	16	116	71	30	5	86-6-025-02-2
BSS-GD-PN16-DN50-1.4571	50	16	158	107	55	6	86-6-050-02-2
BSS-GD-PN16-DN65-1.4571	65	16	178	127	75	6	86-6-065-02-2
BSS-GD-PN16-DN80-1.4571	80	16	192	142	85	8	86-6-080-02-2
BSS-GD-PN16-DN100-1.4571	100	16	220	162	110	8	86-6-100-02-2
BSS-GD-PN16-DN125-1.4571	125	16	240	192	138	9	86-6-125-02-2
BSS-GD-PN16-DN150-1.4571	150	16	266	218	160	9	86-6-150-02-2
BSS-GD-PN16-DN200-1.4571	200	16	322	273	210	12	86-6-200-02-2